

KONE Information 300

Maintenance and Technical Specifications

www.kone.com

This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement in this publication shall be construed as a warranty or condition, express or implied, as to any product, its fitness for any particular purpose, merchantability, quality or representation of the terms of any purchase agreement.

Minor differences between printed and actual colors may exist. KONE, KONE Care™, KONE Customer Care Center™, KONE Remote Monitoring Services™, KONE Modular Based Maintenance™, KONE eOptimum™, KONE Care for Life™, KONE Voice Link™, KONE Data Link™ are registered trademarks of KONE Corporation. Copyright © 2018 KONE Corporation.

Table of contents

1	About this document	3
1.1	Audience.....	3
2	Cleaning	3
3	Technical specifications	4
3.1	KONE MediaScreen.....	4
3.2	KONE MediaPlayer.....	7

1 About this document

This document describes how to maintain KONE Information 300, and lists the products' technical specifications.

For more information on using KONE Information 300, go to:

<https://www.kone.com/en/kone-information-300>

1.1 Audience

This document is intended for the owner, maintenance, and cleaning personnel of KONE Information 300.


2 Cleaning

Use a moist (not wet) micro-fiber cloth to wipe the device and the display.

Never use strong solvents such as acetone, as they melt the display surface. Never spray solvents directly on the device. Apply the solvent to the cloth and wipe with the cloth.

3 Technical specifications

3.1 KONE MediaScreen

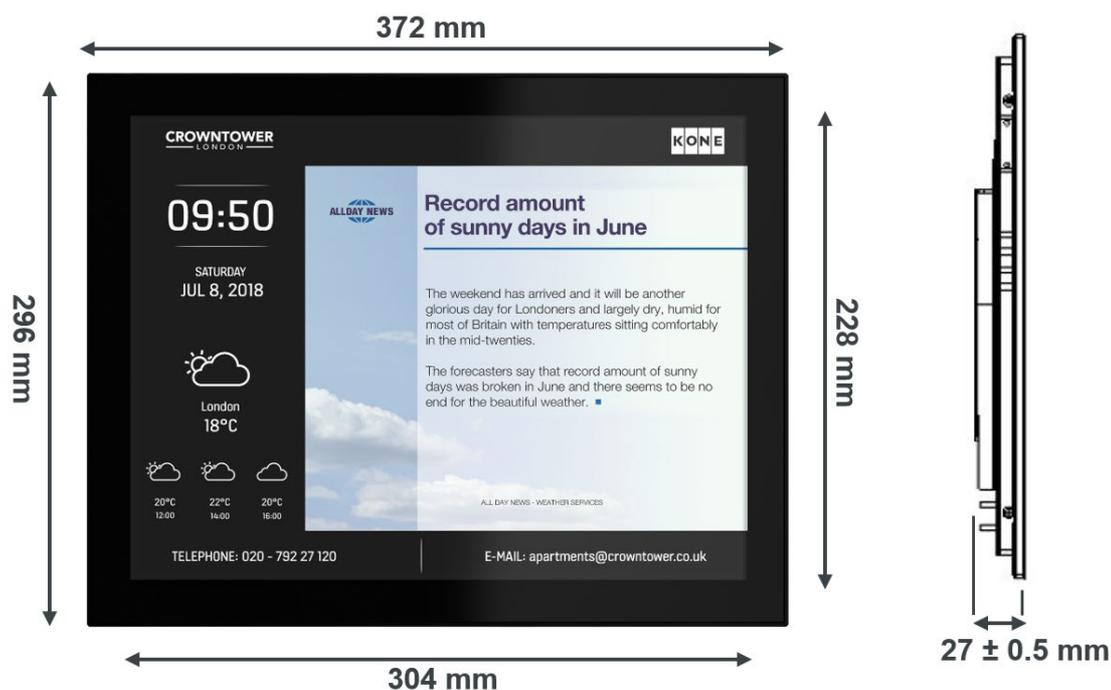

Screen unit	
Diagonal size	15"
Display area	304 x 228 mm
Resolution	1024 x 768 pixels
Aspect ratio	4:3
Brightness	300 cd/m ² (typical)
Contrast ratio	1500:1 (typical)
Horizontal viewing angle	85 (typical)
Vertical viewing angle	85 (typical)
Drive system	TFT LCD
Display colors	16.2M / 262K


Polarizer surface	Hard coating (3H), anti-glare
Backlight	LED
Service lifetime	50 000 h
Glass	Tempered glass, 3.2 mm thick

Application unit	
Flash / eMMC	8 GB
Connectivity	4G
Interfaces	USB host 2.0 x 2 (not in use)
	24VDC power connector
	SPI
	HDMI (1.4a) 1080p output (disabled)
	SIM card holder
	LTE SMA antenna
	100/10M Ethernet

Operational requirements	
Operating temperature	-20 to +60 °C
Storage temperature (non-operating)	-30 to +70 °C
Operating humidity	10 % RH - 85 % RH
Protection class	IP21
Power consumption	800 mA / 20 W
Power connection on elevator car roof	230VAC

2G / 3G / 4G bands	
LTE FDD	B1 / B3 / B5 / B7 / B8 / B20
LTE TDD	B38 / B40 / B41
WCDMA	B1 / B5 / B8
GSM	B3 / B8

3.2 KONE MediaPlayer

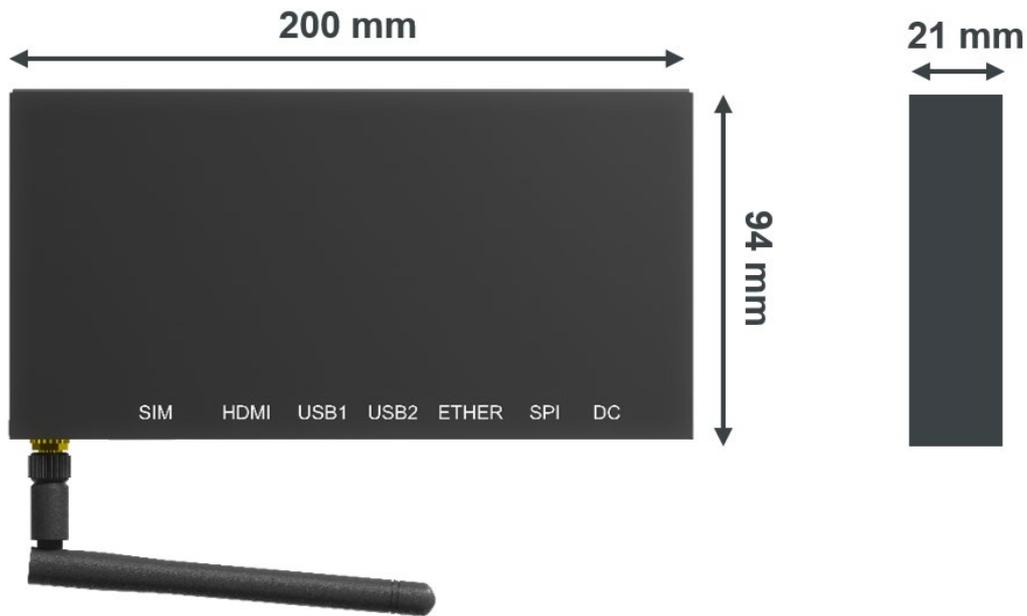

Application unit	
Flash / eMMC	8 GB
Connectivity	4G
Interfaces	USB host 2.0 x 2
	24VDC power connector
	SPI (disabled)
	HDMI (1.4a) 1080p output
	SIM card holder
	LTE SMA antenna
	100/10M Ethernet

Operational requirements	
Operating temperature	-20 to +70 °C
Storage temperature (non-operating)	-40 to +80 °C
Operating humidity	10 % RH - 90 % RH
Protection class	IP21
Power consumption	650 mA / 16 W

2G / 3G / 4G bands	
LTE FDD	B1 / B3 / B5 / B7 / B8 / B20
LTE TDD	B38 / B40 / B41
WCDMA	B1 / B5 / B8
GSM	B3 / B8